

### WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(21) International Application Number: PCT/SE92	A1 2/003	(43) International Publication Date: 10 December 1992 (10.12.92		
(21) International Apparentes Automotive Control of the Control of	2/003	6 (74) Agents: WIDÉN Biörn et al.: Kabi Pharmacia AB, S-75		
(22) International Fining Date.	(21) International Application Number: PCT/SE92/00386 (22) International Filing Date: 5 June 1992 (05.06.92)			
(30) Priority data: 9101735-0 7 June 1991 (07.06.91)  (71) Applicant (for all designated States except US): PHA CIA BIOSENSOR AB [SE/SE]; S-751 82 Uppsa  (72) Inventors; and (75) Inventors/Applicants (for US only): PEDERSEN, [SE/SE]; Källarbācksvägen 25, S-757 57 Uppsa STÅLBERG, Ralph [SE/SE]; Elin Wägnersgata 754 41 Uppsala (SE).	IARM ala (SE Lenna ala (SI	(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GB (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent), US.  Published  With international search report.		

(54) Title: METHOD AND SENSOR MEANS FOR DETERMINING MYOCARDIAL INFARCTION MARKERS

#### (57) Abstract

A method of determining myocardial infarction analytes comprises (i) simultaneously determining from a blood, serum or plasma sample from a patient at least two different myocardial infarction analytes by contacting the sample with a flow cell sensor surface area or areas (3) supporting specific analyte binding ligands (8), and detecting any binding interactions at the sensor surface (3); (ii) removing bound analytes from the sensor surface (3); (iii) repeating steps (i) - (ii) for at least a second sample taken at a determined time interval from the first sample; and (iv) determining from the results obtained the variation with time of the cardiac analytes. A sensor means (2, 3) for use in the method has removably coupled to its sensing area(s) (3) at least two different ligands (8) specific for myocardial infarction analytes.

# CONTRACTOR OF MARKET TO SEE WHILE BOTHER THE CHARLES

#### FRITTENSON STORMERS MAN

that are all the first TO THE BOTT OF THE POST OF THE PERSON OF THE Continue Continue Sign of the Continue to Sign of the Continue Continue Continue Continue Continue Continue Co in the transfer was a remarkable to the season of the seas for visit a first two . Frame holden with Activities to a control of the entropy of all and the 1 1 1971 B 1 2 4 1 8 1 1 18,710 157 10.715 CONTRACTED The region with Each on the Colonial Actions ANTORON OF THE PORT WITH STORY

Some and the state of the factor of the second of the seco The St. (Pray - Street and Introduced to Comme dentity to the specificacy of the second

THE PART PRINCIPLE STANDARD FOR LINE WAS ARROUNDED FOR THE SUPPLEMENT. And Committee with an arms of the Committee of the - Manager to a to the term to a contract the contract to the contract and the contract to th second with a more endowers with the Although the description of the property of the p

The expert  $0.47 \pm 0.08$  to the leader friedman  $20.85 \pm 0.08$ The Residence of the The report of the second of th "我们是一种的现在,我就是一个一整个鞋上,我们就会一个人,不是这些一个好的,而且这些人为事的。"

To ever a first areast of epith grown as the chemical is a discensional Benefit out some mode bus includes

the raing about the last dublicates. I 127 CERTAIN AND A CONTROL OF THE PURPOSES OF INFORMATION ONLY Codes used to identify States party to the PCI on the front pages of pamphlets publishing international applications under the PCL e action is so to each necessity or an arms are the MI Mali

Min Mali

Mongolia ( 8 f.) Austria Land (1907) First a Hinland, Stormann & C. France FR AU, Australia Barbalos Barb TETIVICA DEGADA GADA BARBAR SALAR MW Mauritania Malawi . 37 MW . United Kingdom Belgium R. Netherlands
Burkina Faso CP Greater

CP Gre BE BF Burkina Fasto

GR Greece

Bulgarta

HU 19 Hungary 2007 Fig. 12 COLDER RO Romania 11 7 BC RI Ireland ıΕ Russian Federation Brazil 10 To 3 Creek Community College Community College Community College Col BR Sudan Total Jan CA Central African Republic JP Japan
Central African Republic KP 17 Democratic People's Republic Japan -CF. Sweden Senegal Congo SN . ĊG of Korca Switzerland
Côte d'Ivoire
C KR Republic of Korea CH. SU Soviet Union ' · TD. . . . . . . ci 1 ∈ Chad Liechtenstein LI Camproon
Cechiologakia CM Togo TG Cunited States of America CS ÜS Luxembourg LU Ciermany LU Denmark MC2 DE Monaco. Madagiscar . : DK

Snain

ES

### METHOD AND SENSOR MEANS FOR DETERMINING MYOCARDIAL INFARCTION MARKERS

5

10

15

20

25

30

35

#### FIELD OF THE INVENTION

This invention relates to a method of simultaneously assessing from blood samples the variation with time of at least two different and independent markers indicative of myocardial damage to provide for early and reliable diagnosis of myocardial infarction as well as to improve the monitoring of the treatment and recovery after a myocardial event. The invention also relates to a sensor unit to be used in the method.

### BACKGROUND OF THE INVENTION AND PRIOR ART

Acute myocardial infarction (AMI) is a major cause of deaths in the developed countries, the medical term describing the development of ischemia and necrosis of a portion of the myocardium. The ischemia is caused by occlusion of the artery by a thrombus preventing normal blood flow to the affected area of the myocardium and eventually resulting in tissue necrosis.

A number of serious complications like pulmonary edema, hypertension, thromboembolism, and ruptures of the heart can occur in AMI. Correct diagnosis and appropriate treatment at an early stage increases the chance of survival and diminishes the risk of complications. It is therefore essential that patients with suspected AMI are immediately sent to hospital for diagnosis and treatment.

The current clinical diagnosis of AMI is based on chest pain (sudden onset of pain which sustains for more than 15 minutes), electrocardiogram (ECG) and levels and kinetics of heart muscle specific enzymes and proteins. While chest pain and observed ECG changes may be sufficient for a safe diagnosis in some cases, they are, however, often of a rather nonspecific nature, and the final confirmation of AMI and differentiation from other cardiac or non-cardiac events can for a large group of patients only be made by monitoring the mentioned biochemical parameters by blood sampling at regular intervals, usually

10-51-51

**的结构的工产的工作** 

6 to 18 hours between sampling, and analysis at centralized laboratories. Today a patient with suspected AMI therefore may spend from a few hours to more than 48 hours at the coronary or intensive care unit before a reliable diagnosis can be made, depending on the individual patient and the readiness of the physician. The rate allower

It is, of course, desirable that the correct diagnosis could be made in all cases at an earlier stage. On one hand, in case of an AMI, the early intervention with 10 appropriate treatment with thrombolytics would reduce the mortality and diminish the risk of complications. In fact, thrombolytics have to be used within the first six hours from the onset of pain to be beneficial, the mortality being substantially reduced the earlier the treatment is established (around 10% per hour). On the other hand, the relatively larger group of patients (about two thirds) not suffering from AMI could be excluded from expensive, inappropriate and sometimes fatal therapy, other causes of the AMI-like symptoms being e.g. angina pectoris or pain from the gastro-enterological tract. Thus, the treatment with thrombolytics has severe side effects such as stroke and haemorrhagic bleedings. Today up to around 2% of the patients treated with the current thrombolytics, tissue plasminogen activator (tPA) and streptokinase, are hit with these side effects. Accurate diagnosis is thus fundamental in these cases. Also, the great economic importance of such early identification of the patients not requiring the AMI treatment is readily appreciated, considering the substantial cost reductions obtained when such patients 30 after a much shorter time than before may be transferred to an ordinary medical ward or in the most favourable cases can be sent home.

In the treatment of AMI by thrombolytics the objective of the treatment is to achieve reperfusion of the blocked coronary artery before the tissue has got an irreversible damage. It is known that the cardiac enzymes show different patterns if a reperfusion is achieved or not. It is a matter of course that a real-time analysis permitting

....

. 3.5

bedside monitoring of the patients would be desired. So far this has not been feasible with today's assay methods and regard a critical contraction of the great technology.

Similarly, it would, of course, also be desirable to 5 be able to continuously monitor cardiac enzymes for detecting a possible AMI initiated during thorax surgery before closing the thorax. All Distriction of the second

Current serum assays are based on the leakage of intra-cellular enzymes-or other proteins from the damaged 10 or necrotic cells which result from the myocardial infarction. The recognized standard assay for the detection of a heart attack has for a long time been the creatine kinase (CK) test. This test involves the determination of CK and its isoenzyme CK-MB which exhibit detectable peak concentrations around twelve hours after the myocardial event has occurred. Another conventional protein tested is lactate dehydrogenase (LD) and its isoenzymes, and in recent times the determination of noncatalytic proteins like myoglobin and troponin T has been rendered possible as 20 a result of sensitive immunological determination methods. Still another protein known to be released from cardiac muscle following myocardial infarction and forming the basis of a test is myosin light chain. Each one of the mentioned marker proteins exhibits specific serum 25 concentration changes corresponding to the kinetics and release of the respective protein in an acute infarction.

The combined analysis of two markers has been suggested to improve the recognition of myocardial infarction. Thus, combined analysis of CK and LD is described in e.g. Limbird, Lee, Diss. Abstr. Int. B 1974, 34(11), 5322-3. The and end of a librar do we

WO91/01498 discloses the simultaneous or sequential testing for creatine kinase and myosin light chain for the early detection of a myocardial infarction. While the 35 combination of the two assays is said to provide a very reliable diagnostic test for the early phase of a heart attack, it also permits differentiation between a myocardial infarction and other ischemic events causing

Daries et la magazin de

cardiac pain, such as angina pectoris. The latter feature is due to the fact that myosin light chain is released not only in case of an acute myocardial infarction, but also for other cardiac injuries, whereas creatine kinase is 5 substantially only released in the instance of an acute myocardial infarction.

While the dual combination assays of the type described above offer a more accurate and reliable diagnosis, they suffer from the basic disadvantage of being 10 based on conventional type assays, usually solid-phase enzyme immunoassays, which have to be performed at a laboratory and usually cause a considerable time to pass before the final diagnosis can be made, as mentioned above.

There is therefore a need of an assay procedure which permits a reliable diagnosis of a possible myocardial infarction to be obtained in a shorter time, which in its entirety may be performed at or in the close vicinity of the patient, and which may easily be automated.

## SUMMARY OF THE INVENTION

One object of the present invention is therefore to provide an assay method by which it is possible to reliably diagnose AMI in such a short time that a treatment with thrombolytics will be beneficial.

Another object of the invention is to provide an assay 25 method by which it is possible to rapidly and reliably exclude AMI to thereby reduce care costs in that such patients within a short time may be transferred to an ordinary (substantially less costly) ward or even be sent

30 Still another object of the invention is to provide an assay method by which it is possible to efficiently monitor the treatment of an AMI with thrombolytics such that the treatment may be immediately interrupted as soon as reperfusion has been obtained, or the patient may be subjected to an alternative treatment in case reperfusion is not obtained in a reasonable time.

Another object of the invention is to provide an assay method for the diagnosis of AMI or monitoring of treatment

with thrombolytics that may be performed at or close to the patient's bedside.

Still another object of the invention is to provide an assay method for monitoring cardiac enzymes to detect the possible initiation of an AMI during thorax surgery, and which may be performed in the operating room.

A further object of the invention is to provide a sensor means for use in the assay methods mentioned above.

The above mentioned objects are achieved with the

method and sensor means of the present invention. A basic concept of the invention resides in determining with short intervals the variation with time of at least two, preferably at least three different markers, i.e. enzymes or proteins, of myocardial infarction in real-time

measurements in a flow cell system, which measurements are based upon interactions of the analytes with ligands bound to a sensor surface, the interactions causing a detectable change of the physico-chemical characteristics of the surface. While the study of at least two different cardiac

analytes or markers will provide sufficient information for insuring an early diagnosis, the use of sensor surface technology to detect analyte-ligand interactions provides for real-time analytical procedures which are sufficiently rapid for permitting the analysis of blood samples taken at

25 short intervals and which also are apt to automation and need not be performed at a laboratory, but may readily be performed at the patient's bedside or in an operating room.

or "different analytes" as used herein mean markers or analytes originating from different and discrete genomes.

Therefore, any post-translational modifications like glycosylation or fragmentation of macromolecules do not qualify them as being regarded as "different" analytes. For example, CK-MMA and CK-MMB are not different analytes in the context of the present invention.

Thus, in accordance with one aspect of the invention there is provided a method of AMI marker determination or monitoring, comprising the steps of

20

CONTRACTOR TO

(i) simultaneously determining from a first blood, serum or plasma sample from a patient at least two, preferably at least three different analytes indicative of myocardial infarction by contacting in a flow cell or cells the sample with one or more sensor surface areas each supporting a different ligand or mixture of different ligands capable of specifically binding to a respective analyte, and, optionally after additionally binding an analyte specific reagent or reagent complex to the bound analytes, detecting any hinding interaction of each analyte with its ligand as a consequential change of the physicochemical characteristics of the sensor surface;

(ii) removing each bound analyte from its sensor surface bound ligand by passing a regenerating liquid 15 through the flow cell;

(iii) repeating step (i) for at least a second blood, serum or plasma sample taken from the patient at a determined time interval from said first sample; and

(iv) determining from the results of steps (i) to (iii) the variation with time of said cardiac analytes.

By the term "reagent complex" as used herein is meant that the reagent is bound to one ore more other species. Such a reagent complex may be added as an assembly or be formed successively after the reagent has bound to the 25 analyte as will be further elucidated below.

In accordance with another aspect of the invention there is provided a sensor means comprising, immobilized to one or more sensing areas thereof, either individually or in combination, at least two, preferably at least three different ligands; each ligand being capable of specifically binding to a respective analyte indicative of myocardial infarction, said sensor means being adapted for the detection of any analyte-ligand interaction as a consequential change of the physico-chemical characteristics of the sensing surface, and said ligand

supporting surface areas being regeneratable after the coupling of analytes thereto.

15

The different ligands may thus be either individually immobilized to respective sensing areas, or co-immobilized to a single sensing area. Combinations of these embodiments are, of course, also possible, i.e. that there are two or

5 more sensing areas, each area supporting co-immobilized ligands.

In a preferred embodiment the sensor surface is a surface capable of exhibiting surface plasmon resonance (SPR) and the detection of the cardiac analytes or markers is carried out by surface plasmon resonance spectrometry.

## BRIEF DESCRIPTION OF THE DRAWINGS

other objects and advantages of the invention will be apparent to those skilled in the art from the following detailed description thereof taxen in conjunction with the accompanying drawings. In the drawings:

Fig. 1 is a schematic illustration of a per se known SPR-based flow cell measurement system:

Fig. 2 is an exploded sectional partial view of a flow cell unit useful for the purposes of the present invention;

Fig. 3 is an SPR-sensor diagram showing the coimmobilization of a monoclonal antibody specific for CK-MB and a monoclonal antibody specific for myoglobin to a sensing surface;

Fig. 4 is a corresponding diagram as in Fig. 3 showing the analysis of a sample containing elevated levels of CK-MB and myoglobin using the sensing surface with immobilized CK-MB and myoglobin monoclonals in Fig. 3; and

Fig. 5 is a corresponding diagram as in Fig. 4 showing the analysis of a sample not containing CK-MB and only a normal level of myoglobin.

# DETAILED DESCRIPTION OF THE INVENTION

As mentioned above one basic feature of the invention resides in the simultaneous measurement of several, viz. at least two, preferably, however, at least three, or even e.g. four or five, different myocardial infarction markers or analytes. While the diagnostic sensitivity and specificity of such markers will vary, the appropriate selection of analytes and the determination thereof

医乳球 舞 二級医科 点 我不 医解抗 医性成晶形成石

simultaneously from blood samples taken at short intervals will provide for an analytical picture or pattern which will be very useful for diagnosing or excluding AMI. The relationship between the various analytes during a certain 5 time interval will also give an indication of how long an infarction condition has been going on, for example based upon the rise of the level of one analyte and the decline of another. Likewise, the areas under the respective analyte graphs will indicate the extent of the damage to rica de la capación de la timbra de 10 the cardiac muscle tissue.

The term "simultaneously" as used herein is to be understood in a rather broad sense meaning that the respective determinations of the analytes need not be started exactly simultaneously but that certain delays may be permitted as long as a comparison between the different analyte levels determined may be considered as meaningful.

Another basic feature of the invention lies in the already mentioned repeated analyses at, preferably, regular short intervals permitting the variation of time of the

cardiac markers to be determined. Such information will considerably improve the possibilities of making a reliable THE AMINGIAGNOSIS OF exclusion.

The combination the above basic features will permit a very reliable diagnosis or exclusion of AMI to be

25 established at a desirably short time after the patient has been brought to hospital, or in the alternative, efficient monitoring of the treatment with thrombolytics as well as west be the attended.

of thorax surgery.

An apparatus system enabling the desired type of 30 analytical procedures to be performed should (i) rely on a measuring principle based upon the interaction of the analytes with ligands immobilized to a sensor surface and detecting complex formation as a consequential change of the physico-chemical properties of the sensor surface; (ii) 35 have a flow cell system permitting the desired simultaneous detection of several analytes; and (iii) have a sensor surface or surfaces which can be regenerated in situ in the sense that bound analytes may be removed from the

respective ligands to permit consecutive analyses on one cand the same sensor surface(s) after a regenerating step. All the requirements (i) to (iii) may be met by analytical technology which is known per se in the art.

In order to increase the above mentioned change of the physico-chemical properties of the sensor surface, further complexing of the bound analytes, and thereby an increase of the thickness of the bound substance layer, may be accomplished by reacting the ligand bound analytes with a secondary reagent specific to the analyte, i.e. a. sandwich assay, as is per se known in the art. Such bound secondary reagent may then, if desired, be further complexed by reacting it with a tertiary reagent, etc. to

still more increase the surface change to be detected. 15 In the case of optically based methods, and especially those based upon SPR spectroscopy, it is possible to increase the detected surface change further by labelling of the secondary and/or tertiary reagent, etc by an optically dense species, such as a particulate label, for example, glass, latex, colloidal silver or gold, metal oxide or ferritin; see e.g. EP-A-276 142.

By using a secondary reagent to perform a sandwich type assay on the sensor surface as outlined above, not only the sensitivity and in some cases the specificity will 25 be increased, but also the dynamic measuring range may be extended in that the primary response may be used rather than the secondary response if the range of the latter would be insufficient.

The measuring principle as defined above will enable 30 real-time measurements to be conducted and thereby permit the desired performance of consecutive analyses of blood samples taken with short intervals. Such a measuring principle, and the sensor surface associated therewith, is also readily adaptable to flow cell systems. Among methods relying on the said measuring principle may be mentioned internal reflectance methods, particularly evanescent wave spectroscopy (EWS), such as attenuated internal reflection (ATR) spectroscopy, total internal reflectance fluorescence

15

20

(TIRF) spectroscopy, and surface plasmon resonance (SPR) spectroscopy, or wave guide spectroscopy. All these methods are based upon the examination of an optical property of a solution bordering a surface where total internal reflection has occurred. Other types of sensors that may be used are those based upon photoacoustic piezoelectric, surface acoustic wave (SAW), or electrochemical measurements, etc. Particularly suitable for the purposes of the invention is SPR spectroscopy as will be described in more detail below.

A flow cell system is essential for providing a rapid and easy to handle system apt to automation. By the term "flow cell" (which is to be interpreted in a broad sense) is meant that the sample and other analytical fluids will flow past the sensing surface or surfaces at a constant rate. Such a system may, as mentioned above, in one embodiment thereof comprise a plurality of sensing surface areas, i.e. one for each cardiac analyte as well as a control area, and optionally one or more areas for other purposes as will be described below. The flow may be either in parallel or in series with respect to the different sensing surface areas. A parallel flow cell system may comprise several separate flow cells arranged in parallel, whereas in a series system several separate flow cells may be connected in series. A parallel or serial flow system, respectively, may also be formed by several defined sensing surface areas contained within a single flow cell. For an example of a flow cell system comprising several flow cells, it is referred to our published PCT-application WO 90/05295 (the full disclosure of which is incorporated by reference herein) disclosing a fluid handling block unit comprising a plurality of open channels for defining multiple flow cells together with a sensor plate applied e en 18 agricultura e anno 10 a 190 il en 1900 a thereto.

In another and novel embodiment of flow cell system, the ligands for all the cardiac analytes may, as already mentioned above, be commobilized in a single surface area. Thus, the specific response (Stenberg et al., J.

Colloid Interface Sci. 143 (1991) 513) for surface concentration detecting devices, such as surface plasmon resonance detection, is in principle (at least down to the diffraction limitations of the optical system) independent of the size of the detecting area. This is in contrast to absolute measuring devices such as ordinary solid phase assays where the specific response is area dependent.

Normally, the different immobilized capturing molecules are immobilized to different detection areas as described above. The independence of area size for the surface concentration detecting device will, however, in accordance with this novel and inventive concept, allow reduction in the number of detection areas by coimmobilization of two or more different capturing molecules onto the same area, the specificity then being revealed by sequential injections of second reagents (such as antibodies) specific for each analyte bound by the respective capturing molecules. As is readily understood, such a procedure will greatly reduce the complexity of the optical and mechanical design of the system for the concentration determination of a panel of analytes.

Sensor surfaces which may be regenerated as defined above a substantial number of times, e.g. 50 to 100 times, are known per se in the art and are, for example, described in our published PCT-application WO 90/05305 (the full disclosure of which is incorporated by reference herein). These sensor surfaces comprise a substrate coated with a metal film to which has been attached a layer of an organic polymer or a hydrogel forming acso-called basal surface which may contain functional groups for selectively binding the desired ligands. For further details on the production of such surfaces it is referred to our published PCTapplication WO 90/05303 (the full disclosure of which is incorporated by reference herein). Such a surface is easily regeneratable in situ in a flow cell. Thus, after the determination of one sample is completed, the bound analytes can be removed from the respective ligands to prepare the sensing surface(s) for a subsequent assay of

35

人名英格兰 医电影电影 美国市

another sample. This is made possible by the binding of the analyte to the ligand being broken by the regenerating fluid whereas the binding of the ligand to the sensor surface is not.

from which the test panel may be selected are myoglobin, creatine kinase (CK) (also known as creatine phosphokinase) and its isoenzymes and isomers thereof, especially CK-MB, tropomyosin, lactate dehydrogenase (LD), troponin C, T and I, aspartate aminotransferase, and myosin, especially the light chain thereof.

Presently preferred infarction markers for the purposes of the present invention are CK-MB, myoglobin and troponin I.

- However, none of the above mentioned markers is absolutely specific for acute cardiac muscle damage. For example, both CK-MB and myoglobin may also be present in skeletal muscle damages. It is therefore, as already mentioned above, preferable to simultaneously test for one
- or more control analytes. One example of such a control analyte is carbonic anhydrase III (CA III) which has been shown to be present in substantial amounts in skeletal muscle, in minor amounts in i.a. smooth muscle cells, but not at all in the myocardium. CA III can therefore be used
  - to distinguish whether increased concentrations of e.g. myoglobin originate from cardiac or skeletal muscle (see e.g. Vaananen H.K. et al., Clin. Chem. 36/4, 635-638

The ligands for the specifically binding cardiac

analytes, such as those mentioned above, are usually
antibodies, particularly monoclonal antibodies. By the term
"antibodies" as used herein is also to be understood active
antibody fragments, antibodies and fragments thereof
produced by genetic engineering, etc.

The functionalizing of the basal sensor surface with the ligands is simplified if the ligands are chimeric molecules, i.e. comprise a common part for binding to the basal surface and a variable part for binding to the

surface comprises a basal dextran layer, the chimeric molecule may consist of an antibody to dextran which is conjugated to a monoclonal directed against the desired cardiac analyte.

Antibodies that may be used as ligands are described in the prior art, and may also be produced by methods known per se, e.g. by hybridoma or recombinant DNA technology.

Thus, antibodies against creatine kinase and creatine kinase MB are, for example, described in EP-A-288 179, EP-A-339 814, EP-A-261 781, and US-A-4,912,033.

Antibodies against myosin light chain are, for instance, disclosed by WO 91/01498, WO 90/15329, and US-A-4,879,216.

Antibodies directed against troponin T are described in, for example, EP-A-394,819, and antibodies against troponin I are described by Cummins B. et al., Biochem. Soc. Trans. 15 (1987) 1060-61.

Myoglobin antibodies are, for instance, disclosed in JP-A-54011231.

Antibodies directed against lactate denydrogenase are described in, for example, DE-A-2 350 711.

The preparation of antibodies directed against CA III are described by Väänänen H.K. et al., Histochemistry 1985;

25 683: 231-5, and by Kato K. et al., Clin. Chim. Acta 141 (1984) 169-177.

Several antibodies are also commercially available, such as monoclonals against CK-MB and myoglobin.

For the functionalization of the sensor surfaces with the ligands for the respective cardiac analytes it is referred to the aforementioned WO 90/050305.

mne blood samples taken from the patient may be analyzed directly as whole blood, but it may be preferable to use plasma or serum prepared from the blood sample, e.g. as obtained by an initial centrifugation or filtration

as obtained by an initial centrifugation or filtration step.

With the above described method and sensor means of the present invention, using the mentioned analytical

35

apparatus, it is thus possible to in a short time, by taking blood samples at short intervals and using bedside apparatus and thereby dispensing with central laboratory determinations, diagnose or exclude, respectively, an AMI.

Similarly, the treatment with a thrombolytic, as well as the state of the myocardium during heart surgery may readily be monitored, as already mentioned above.

A further beneficial feature of the method of the present invention is that it may also provide information about the presence in the blood samples of antibodies against streptokinase. Thus, whereas streptokinase is about tenfold cheaper than tissue plasminogen activator (tPA), tPA is necessary if the patient has a high level of antibodies against streptokinase or is allergic thereto. 15 About 90% of the patients experiencing a reinfarcation within a year have neutralizing antibodies. Neutralizing antibodies can also occur after a flu, if the infection is caused by streptococcal bacteria. Therefore, the method of the invention preferably also comprises testing for such 20 neutralizing streptokinase antibodies by including a streptokinase ligand (or an antibody against the antistreptokinase antibody) in the or one of the sensing areas. Thereby such crucial information about the level of neutralizing streptokinase antibodies in a patient can be

performed.

In a preferred embodiment the present invention thus comprises determining (i) at least two, and preferably at least three, different infarction analytes; (II) one or optionally more control analytes; and (iii) streptokinase antibodies.

25 determined at the same time as the AMI diagnosis is

Hereinafter the invention will be described, by way of example only, with regard to a particular SPR-based embodiment, reference being made to Figs. 1 and 2 mentioned above. First, however, the surface plasmon resonance (SPR) phenomenon will be briefly explained.

If the angle of incidence of light directed towards an interface between two transparent media of different

refractive indices exceeds a critical angle, the light is reflected back into the medium having the higher refractive index, so-called total internal reflection. However, despite the total reflection an electromagnetic field component of the light called the "evanescent wave" penetrates a short distance (of the order of a wave length) into the medium of lower refractive index. If the interface between the media is coated with a thin metal film, such as silver or gold, and the light is plane-polarized and monochromatic, the evanescent wave will at a certain angle of incidence interact with collective electron oscillations, called plasmons, in the metal. This phenomenon - called surface plasmon resonance (SPR) - will be observed as an intensity dip in the reflected light. To 15 couple the light to the interface such that SPR arises, two alternative arrangements are used, either a metallized diffraction grating (Woods effect) or a metallized glass prism or a prism in optical contact with a metallized glass substrate (Kretschmann effect). The specific angle of the occurrence of SPR is sensitive to refractive index changes close to the interface of the medium of the lower refractive index. Thus, if the high refractive index medium is glass and the medium of lower refractive index is an aqueous solution in contact with the glass, changes of the solution close to the interface, e.g. by the adsorption of 25 a protein layer, will cause a corresponding shift of the resonance angle. SPR may therefore be used for detecting e.g. immunoassay reactions as is well known in the art.

A schematic illustration of an SPR based biosensor system of the flow cell type which is known in the art and may be used for the purposes of the invention is shown in Fig. 1. In the figure a flow channel 1 has an open top portion covered by a sensor plate or chip 2 of glass coated with a metal film 3, more specifically of gold, to define a flow cell. A prism 4 contacts the other side of the glass plate 2 to couple a wedge-shaped beam 5 of p-polarized light from a monochromatic light source 6 thereto. The reflected light is directed against a detection unit 7

\$65,000 B THE FE

comprising a matrix (i.e. rows and columns) of photodetectors. The gold film surface exposed to the fluid passing through flow cell 1 has ligands 8 immobilized thereto as will be further described below.

Since the beam of light 5 reflected at the glass-metal interface represents a continuous range of incident angles, a shift in the resonance angle caused by a change in the concentration of biomolecules at the metal surface may be detected by the detector unit 7. For a more comprehensive 10 description of the above described biosensor system, including optical system, sensor unit, and liquid handling

unit, it is referred to our aforementioned WO 90/05295.

The use of a biosensor system of the above outlined type for the purposes of the present invention will now be described. Fig. 2 schematically illustrates a part of a liquid handling block unit 9 comprising four flow cells 10, corresponding to flow cell 1 in Fig. 1. The flow cells 10 are, as in Fig. 1, defined by upwardly open channel parts 11 covered by a sensor plate 12, corresponding to sensor 20 plate 2 in Fig. 1. In the figure dis also illustrated an optointerface 13 for effecting optical contact between the sensor plate 12 and a prism corresponding to prism 4 in Fig. 1. The optointerface consists of a thin glass plate having elastic material pieces 14 on both sides with a 25 refractive index matching that of the sensor plate 12. When the assembly of liquid handling block unit 9, sensor plate r: 2.312 and optointerface 13 is arranged in the biosensor system schematically illustrated in Fig. 1 (replacing flow channel 1 and sensor plate 2 therein); the wedge-shaped beam 5 will 30 extend transversely across the flow cells, each flow cell corresponding to, e.g., one column of photodetectors in the detector matrix 7.

The gold-coated glass plate 12 has, as a specific example known per se in the art, a hydrophilic matrix of 35 non-crosslinked carboxymethylated dextran covalently bonded to the gold film through an optically and biologically inert linker layer of long chain hydrocarbon. Ligands can be covalently immobilized to the dextran layer after

10

20

activation, (e.g.) by derivatization with N-hydroxysuccinimide (NHS), mediated by N-ethyl-N'-(dimethylaminopropyl) carbodiimide (EDC). The NHS-ester formed readily reacts with uncharged primary amino groups of the ligands to be coupled thereto.

In the flow cells 10 shown in Fig. 2 the sensing areas forming the top part of each flow cell may, for the purposes of the invention, in three of the flow cells 10 support ligands reactive with a respective cardiac analyte to be determined whereas the fourth flow cell preferably is used as a control or reference. For example, one flow cell may support a monoclonal antibody against creatine kinase MB (CK-MB), a second flow cell a monoclonal antibody against myoglobin, a third flow cell a monoclonal antibody against troponin I, and a fourth flow cell a monoclonal antibody against carbonic anhydrase III (CA III) as a control. Of course, more than four flow cells may be used if desired. Thus, for instance, a fifth flow cell may support streptokinase ligands for determining streptokinase antibodies in a sample. Optionally, a sixth flow cell may support a ligand for an additional cardiac infarction analyte. The british as a work

For further details on the immobilization of ligands and reaction conditions for the coupling of the analytes to 25 be determined, it is referred, in addition to the above mentioned WO:90/05303 and WO 90/05305, to the manual "Realtime Biospecific Interaction Analysis, A Guide to Methods and Applications" (1990), Pharmacia Biosensor AB, Uppsala, Sweden (the full disclosure of which is incorporated by 30 reference herein)

A test of a blood plasma sample for the cardiac enzymes creatine kinase MB, myoglobin, and troponin I using the analytical system illustrated in Figs. 1 and 2 may be performed as follows. After removal of the blood cells from a blood sample, a defined volume of the plasma is introduced into the liquid handling unit 9 and evenly distributed among the four flow cells 10. When flowing through the flow cells the mentioned cardiac enzymes, if

**被"我们我们是否不**你

present, will bind to the respective sensing surface supporting the proper ligand. This will cause a shift of the resonance angle, which shift is proportional to the amount of cardiac enzyme bound to the surface, as described 5 above. Thereby the level of each analyte in the sample may be determined. To increase the resonance angle shift detected, the ligand bound analytes are preferably reacted with a secondary reagent in sandwich assay fashion. As already mentioned above, such a secondary reagent may optionally be labelled with an optically dense species to still more increase the shift. Alternatively, a tertiary reagent may be used. After the detection step, the sensor surface is regenerated by passing a regenerating agent, e.g. glycine buffer, or phosphoric, formic or hydrochloric 15 acid (10-100 mM), through the cell. A whole such analytical procedure will take about 15 minutes. Instead of using several flow cells as described above, a single flow cell may be used which has ligands for all the analytes of interest co-immobilized on the same 20 sensing surface area. This embodiment will also be willustrated in the Example below. When a patient with suspected AMI has been brought to the coronary care unit in possession of the biosensor apparatus described above at the patient's bedside, and it has not been possible to establish a safe diagnosis based upon symptoms and ECG, blood samples are taken regularly, land successively analyzed in the described fashion. While already the first sample tested may exhibit such levels of one or more of the analytes tested for that an AMI may directly be diagnosed, 30 a safe and reliable AMI diagnosis or exclusion, based upon the development with time of the analyte levels, will in the majority of cases be obtained within about no more than about two to three hours. In the case of a diagnosed AMI, 35 the patient can then be treated with thrombolytics, i.e. streptokinase or tPA. Preferably, the test panel of the sensor unit also contains a sensing surface area for testing for streptokinase antibodies, and information about

the proper thrombolytic and dosage thereof to select may thereby be obtained at the same time, i.e. resulting in that the dose of streptokinase is adjusted or that tpA is selected rather than streptokinase.

- The same bedside apparatus and test panel may then be used for monitoring the thrombolytic treatment to observe a reperfusion as soon as possible after it has taken place, so that the per se risky treatment may be stopped when no longer necessary or an alternative treatment may be
- introduced if reperfusion is not obtained in a reasonable stime. Especially in such monitoring of thrombolytic treatment, relatively high levels of an analyte of interest, e.g. CK-MB, may be obtained. Thus, if a secondary reagent is used as described above, the dynamic range of
- 15 the secondary response may not be sufficient for permitting the development of the peak value of a specific analyte to be monitored. The occurrence and exact monitoring of such a peak indicative of reperfusion may then be performed by instead measuring the primary response, i.e. the complex
- formation between the analyte and the immobilized ligand. Naturally, the above described procedure and method may also be used for monitoring the myocardium state during thorax surgery such that an AMI initiated during the surgery may be detected and treated before the thorax is 京 2007年代 1960年代 有限代码 (All Sec. 1967年代) 19
- 25 closed In the following non-limiting example, the detection of CK-MB and myoglobin in a plasma sample in accordance with the present invention is described, using a commercial SPR-based biosensor instrument (BIAcoreTM) and sensing 30 surface (Sensor Chip TM CM5) (both marketed by Pharmacia Biosensor AB, Uppsala, Sweden): Tel heare soughteen

### EXAMPLE SEE SEE SEE SEE SEE SEE

గ్రామం గ్రామంలో సమీప్రముణ్ణు ఉంది. A. Co-immobilization of monoclonal antibodies on sensing

Immobilization of a monoclonal antibody specific for CK-MB and a monoclonal antibody specific for myoglobin was performed in the biosensor instrument in the following THE RESERVE TO STREET, THE manner: Attended to the contract the first of the second of the se

A WARRING

of HBS (10 mM Hepes buffer, 0.15 M NaCl, 3.4 mM EDTA, 0.05 % Tween), pH 7.4, over the sensing surface was maintained at 5  $\mu$ l/min. A fraction of the carboxyl groups on the sensing surface was activated to 5 form reactive N-hydroxysuccinimide esters by injecting into the instrument 35. $\mu$ l of a solution containing 0.2 M 1ethyl-3-(dimethylaminopropyl)carbodiimide hydrochloride (EDC) and 0.05 M N-hydroxysuccinimide (NHS) in water. 35  $\mu$ l of the antibody solution containing 50 µg/ml of a 10 monoclonal antibody specific for CK-MB (obtained from BiosPacific, Emeryville, California, U.S.A.) and 50  $\mu$ g/ml of a monoclonal antibody specific for myoglobin (obtained from the Institute of General and Molecular Pathology, Tartu State University, Tartu, Estonia) in 10 mM sodium acetate, pH 5.0, were then injected. A buffer with a pH 15 below the pI of the antibody will give a positive net charge of the protein, and at low ionic strength the antibodies will preconcentrate to the remaining negatively charged carboxyl groups on the surface via electrostatic 20 cattraction giving a high antibody concentration in the matrix. The preconcentration allows fast immobilization with low amount of antibodies. Remaining reactive ester groups were deactivated by injection of 35  $\mu$ l of 1 M ethanolamine hydrochloride, pH 8.5. The sensorgram obtained 25 is shown in Fig. 3 (response in resonance units, RU, plotted versus time in seconds). The response signal was evaluated at two levels: 20 seconds before the injection of EDC/NHS (A) and 9 minutes after the injection of ethanolamine (B). B minus A thus defines the immobilized amount of the two antibodies. 30 B. Analysis of plasma samples

The analysis of CK-MB and myoglobin at elevated levels in a plasma sample, using the sensing surface with co-immobilized antibodies prepared in section A above, was performed in the following manner:

A continuous flow of HBS (10 mM Hepes buffer, 0.15 M NaCl, 3.4 mM EDTA, 0.05 % Tween), pH 7.4, over the sensing surface was maintained at 5  $\mu$ l/min. 35  $\mu$ l of a plasma

35

また ひん かいしょう

sample containing CK-MB and myoglobin were injected into the instrument. 4  $\mu$ l each of second antibodies specific for CK-MB and myoglobin, respectively, at a concentration of 100  $\mu$ g/ml were then injected in sequence followed by 4  $\mu$ l of 10 mM glycine-HCl, pH 2.5. The sensorgram obtained is shown in Fig. 4 (response in resonance units, RU, plotted versus time in seconds). The response signal was evaluated at four levels: 20 seconds before the injection of the

sample (A), 20 seconds before the injection of the second antibody specific for CK-MB (B), 20 seconds before the injection of the second antibody specific for myoglobin (C), and 20 seconds before the injection of glycine-HCl (D). Thus, A defines the baseline, B minus A defines the plasma response, C minus B defines the specific response

for CK-MB, and D minus C defines the specific response for myoglobin. The analysis time was 18 minutes.

The same procedure as described above was then performed for a plasma sample not containing CK-ME and a normal myoglobin level. The sensorgram obtained is shown in Fig. 5. As appears therefrom, no response was obtained when injecting the second antibody specific for CK-ME, whereas a weak response was obtained for the second antibody specific for myoglobin.

The invention is, of course, not restricted to the

25 above specifically described embodiments, rut many

modifications and changes may be made without departing

from the scope of the general inventive concept as defined

in the subsequent claims.

The Committee of the Co

sama Mair Jayan 🦂 🕡 126

List therm, and explicat and or entire the contract be able to

The Property of the Control of the State of the Control of the Con

THE REST OF THE PROPERTY OF THE PARTY OF THE

particles to the control of the first of the

n service es a la proposición de la proposición dela proposición de la proposición dela proposición de la proposición de la proposición dela proposición de la proposición de la proposición de la proposición dela proposición de la proposición de la proposición de l

the same of the first time of the figure of the same same of the term of the same of the s

III 1980 C. S. CHARLES OF THE MEDISON DISCLOSED AND DESCRIPTION OF THE SECOND

BNSDOCID: <WO\_\_\_9221973A1\_I\_>

industrial to a time of the contract of the co

- 1. A method of determining myocardial infarction markers, comprising the steps of
- serum or plasma sample from a patient at least two different analytes indicative of myocardial infarction by contacting in a flow cell or cells the sample with one or more sensor surface areas each supporting a different
- ligand or mixture of different ligands capable of specifically binding to a respective analyte, and, optionally after the additional binding of an analyte specific reagent or reagent complex to the ligand bound analytes, detecting any binding interaction of each analyte with its ligand as a consequential change of the physico-
- chemical characteristics of the sensor surface;

  (ii) removing each bound analyte from its sensor

surface bound ligand by passing a regenerating liquid through the flow cell;

20 (iii) repeating step (i) for at least a second blood, serum or plasma sample taken from the patient at a determined time interval from said first sample; and

- (iv) determining from the results of steps (i) to (iii) the variation with time of said cardiac analytes.
- 2.37 A method according to claim 1, wherein said change of the physico-chemical characteristics of the sensor surface the physico-chemical characteristics of the sensor surface the physico-chemical characteristics of the sensor surface the physics archange in refractive index measured by evanescent wave sensor spectroscopy.
- 30
  c. 3. A method according to claim 2, wherein said evanescent
  wave spectroscopy is surface plasmon resonance
  spectroscopy.
- 35 May. A method according to claim 1, 2 or 3, wherein the sample is contacted with a plurality of sensor surface areas, each supporting a different ligand.

1. The second of the second

- 5. A method according to claim 1, 2 or 3, wherein the sample is contacted with a single sensor surface area having different ligands co-immobilized thereto.
- 5 6. A method according to any one of claims 1 to 5, wherein at least three different cardiac analytes are determined.
- 7. A method according to any one of claims 1 to 5, which
  10 additionally comprises determining streptokinase antibodies
  in the sample by binding to a corresponding ligand
  immobilized to the or one sensor surface area.
- 8. A method according to any one of claims 1 to 7.

  15 wherein said cardiac analytes are selected from the group consisting of myoglobin; creatine kinase and its isoenzymes and isomers thereof, especially creatine kinase MB; myosin, especially the light chain thereof; tropomyosin; lactate dehydrogenase (LD); aspartate aminotransferase; and troponin C, T and I.
  - 9. A method according to claim 8, wherein said cardiac analytes are selected from creatine kinase MB, myoglobin and troponin I.
- comprises determining at least one control analyte.
  - 11. A method according to claim 10, wherein myoglobin is determined and carbonic anhydrase III is a control analyte.
    - 12. Use of the method according to any one of claims 1 to 11 for diagnosing and/or excluding myocardial infarction.
    - 35. 13. Use of the method according to any one of claims 1 to 11 for the monitoring of treatment with thrombolytics.

to form of the little principle of the

25

10

现代的数据 14.00

- 14. A sensor means comprising, immobilized to one or more sensing areas thereof, either individually or in combination, at least two, preferably at least three different ligands, each ligand being capable of specifically binding to a respective analyte indicative of myocardial infarction, said sensor means being adapted for the detection of any analyte-ligand interaction as a consequential change of the physico-chemical characteristics of the sensing surface, and said ligand supporting surface areas being regeneratable after the
- 15. A sensor means according to claim 14, which comprises a plurality of sensing areas, each area supporting a15 different ligand.

coupling of analytes thereto.

- 16. A sensor means according to claim 14, which comprises a single sensing area having different ligands co-immobilized thereto.
- 17. A sensor means according to any one of claims 14 to 16, wherein said ligands are selected from monoclonal antibodies against cardiac enzymes or proteins selected from the group consisting of myoglobin; creatine kinase and its isoenzymes and isomers thereof, especially creatine kinase MB; myosin, especially the light chain thereof; tropomyosin; lactate dehydrogenase (LD), aspartate aminotransferase, and troponin C, T and I; said ligands preferably being selected from the group consisting of creatine kinase MB, myoglobin and troponin I.
  - 18. A sensor means according to any one of claims 14 to 17, which additionally comprises immobilized to a sensing area thereof a ligand capable of binding streptokinase antibodies.
  - 19. A sensor means according to any one of claims 14 to 18, which additionally comprises immobilized to a sensing

35

area or areas thereof at least one ligand for a control analyte.

20. A sensor means according to any one of claims 14 to

20. A sensor means according to any one of claims 14 to 19, which is adapted for surface plasmon resonance spectroscopy.


AND THE RESERVE OF THE RESERVE OF THE STATE OF THE STATE

The second of th


The state of the s


A second to decrease the post of the po


en de la companya de la co

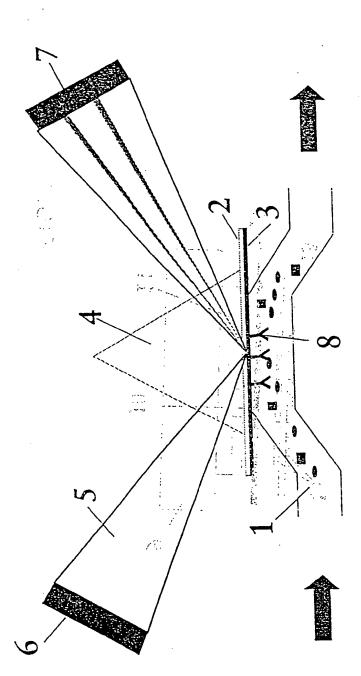

F16.1

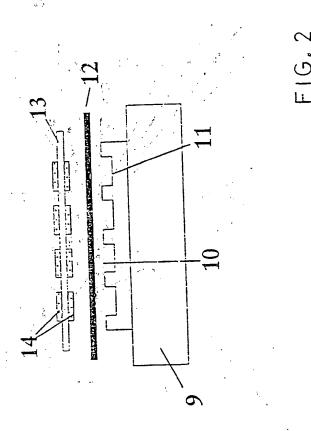

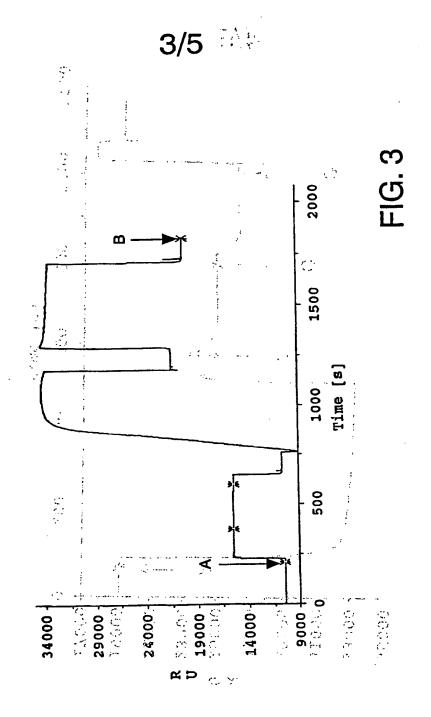

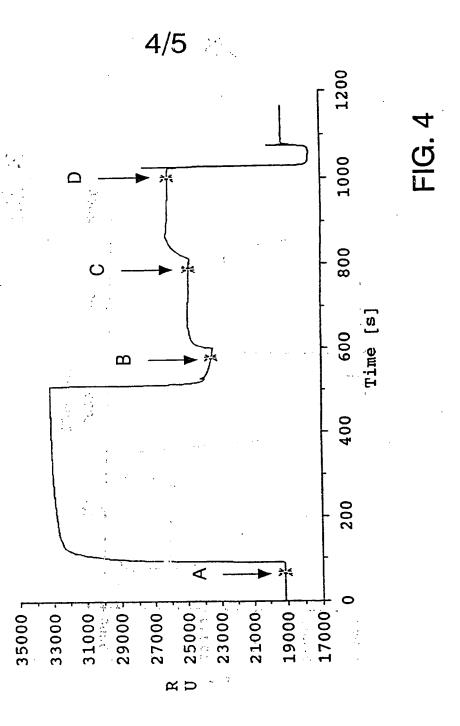

The first of the constant, a

max 1420 m margin to margin to

o kitaka menintangan bah

## THE METALTICAL SEARCH REPORT

International Application No PCT/SE 92/00386

I. CLASSIFICATI N OF SUBJECT MATTER (if several classification symbols apply, indicate ail) 6						
According to Interna	itional Patent Classification (IPC) or to both Hallo	nat Classification and IPC				
IPC5: G UI N	33/53, 33/543					
II. FIELDS SEARCH	IED	Sourchord <sup>7</sup>				
	Minimum Documentat	sification Symbols				
Classification System	Vias					
IPC5						
11 05	G 01 N  Documentation Searched other th	an Minimum Documentation				
	to the Extent that such Documents a	re Included in Fields Searched <sup>8</sup>				
	\$ \\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \					
SE,DK,FI,NO	classes as above					
III. DOCUMENTS C	ONSIDERED TO BE RELEVANT					
Category Cita	tion of Document,11 with Indication, where appro	priate, or the course	Relevant to Claim No.13			
Y FP A	2 0384130 (INTERNATIONAL IM	IMUNOASSAY	1,12			
	ABORATORIES, INC.) 29 August	1990,				
s	ee claims 1-5					
	<del></del>		ļ			
110 A	, 4900662 (V.D. SHAH ET AL.)	)	1			
A US, A	3 February 1990, see column	n 4,				
1	ine 35 - column 5, line 60	!				
		,				
	- CANADO CUTOCIONE PTOLOG	TCALS INC.)	1-12			
A WO, A	1, 9101498 (VIOCLONE BIOLOG February 1991, see page 4,	line 32 -				
	page 6, line 14	,				
'						
		n TANIOMATTON	1,2,			
A EP,	A2, 0266881 (ASTROMED LIMITE	N) D TWWOAY! TON	14			
	CENTRE CAMBRIDGE SCIENCE PAR	K)	1			
	11 May 1988, see claims 1,8					
	g+ 1	agente of				
	the state of the s		the state of the s			
* Special categ	ories of cited documents: 10	"T" later document published after or priority date and not in conf cited to understand the princip	the international filing date lict with the application but le or theory underlying the			
considered to be of particular relevance. The claimed invention "X" document of particular relevance, the claimed invention "X" document of particular relevance, the claimed invention of particular relevance.						
INVOIVE BIT INVESTIGATE SICE						
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  "Y" document of particular relevance, the claimed invention the cannot be considered to involve an inventive step when the cannot be considered to involve an inventive step when the cannot be considered to involve an inventive step.						
"O" document r	"O" document referring to an oral disclosure, use, exhibition or other means.  "O" document is confident with vita vita vita of the art.  "O" document is confident with vita vita vita vita vita vita vita vita					
"P" document plater than t	oublished prior to the international filing date but he priority date claimed	"&" document member of the same	patent family			
IV. CERTIFICATI	ON	Date of Mailing of this International	Search Report			
1	Completion of the International Search	1992 -09- 1				
7th Septem	ber 1992	***	U			
International Sear	ching Authority	Signature of Authorized Officer Thoma - Karrin Per	1			
			wyyrr			
SW Form PCT/ISA/210 (	/EDISH PATENT OFFICE second sheet) (January 1985)	Inga-Karin Petersson				

ĵ,

International Application No. PCT/SE 92/00386

	6.5 se	. 2 . 2		TO US DIS SVANT	<del></del>	FROM THE SECOND SHEET	ASSAA
DOCU	MENTS	Citatio	of Doc	ument, with indication	, where appropriate	, of the relevant passages	Relevant to Claim No
90.3	WO;						14  for colors for buying carry for the first one by buying for the first one by buying for the first one by buying
<b>‹</b>	EP,	A1, LABO see	0467 RATO clai	782 (INTERNAT RIES, INC.) 2 ms: 1-5	IONAL IMMUN 2 January 1	DASSAY 992,	1,12 
		. ~ .		# 40 mm 12 mm		Array Lagrange	1777 1 -
			7 <b>8</b> 814	2014 E. 27. 37.	- 5 - 43 - 3	81-50-56	\$94, 1979
	\ \ \ ;		. <u>.</u>		10.00	70 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m 1 m	and the second of the second o
	10	30 10	26 03	# 65 % 65 \$ 50 63 # 65 by		72 7 3 1 <sub>0</sub>	£*6 1
		わら しよう です。 でも これ。	13 \$1. \$1. \$1. \$1.	\$5.00 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		TI-E CE	N GA B L
		. *	A.F			\$\$+8% (D\$	ALCINA MALLES
			·· · · · ·	• • • • • •	e em la constantina de la constantina della cons	<del>.</del> , <u>.</u> .,	

## ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO PCT/SF 92/00386

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)		rublication date	
EP-A2- 0384130	90-08-29	CA-A-	2008360	90-07-23	
US-A·· 4900662	90-02-13	EP-A- JP-A-	0304628 1054260	89-03-01 89-03-01	
WO-Al- 9101498	91-02-07	AU-D-	5960890	91-02-22	
EP-A2- 0266881	88-05-11	GB-A- JP-A-	219673 <b>4</b> 63091537	88-05-05 88-04-22	
WO-A1- 9005305	90-05-17	EP-A- EP-A- JP-T- JP-T- SE-A- SE-A- WO-A-	0442922 0442930 4501606 4501607 8804074 8902043 90/05306	91-08-28 91-08-28 92-03-19 92-03-19 88-11-10 90-05-17	
EP-A1- 0467782	92-01-22	CA-A-	2047298	92-01-19	

# THIS PAGE BLANK (USPTO)

and the companies of the contract of the contr 1994 To 25 1 1981 range in The territory of the section

and the second second 797 5H D 24

人名西拉克斯 医海绵线

: 11

47 - 14 July 18 - 18 1 18 1 18

the control of the second of the control of the con

Like open Miller Book Davids from B

March 1997 Common Service (Sept. 1997) Add Common Service (Sept. 1997) Add Common Service (Sept. 1997)

The control of the property of the control of the c

MORRO TO ALL CLICK CORRESPONDE CONTRACTOR OF A CONTRACTOR OF CONTRACTOR OF A C

The property of the state of th

190 76 3 1 119 grant of the

Committee of the State of

But with a promise

The state of the s

in a national and high in the in the con-

 $\mathcal{D}_{CC}(x) = \{ x_1, \dots, x_m \} = \{ x_m \in \mathcal{B}(x) \mid x_m \in \mathbb{R}^m \} \quad \forall x_m \in \mathcal{C}$ 

可能,只要用这个数据的数据,并且可以通过的基础的。

THE CONTROL OF THE CO

